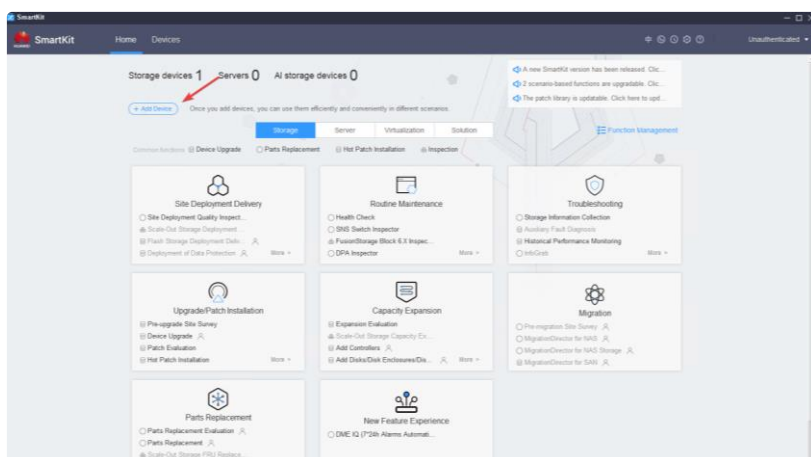# СБОР ЖУРНАЛА СОБЫТИЙ с Huawei
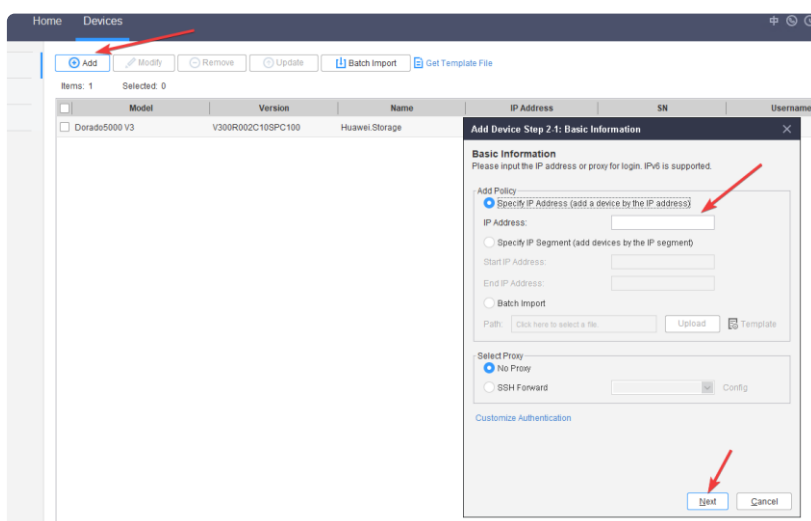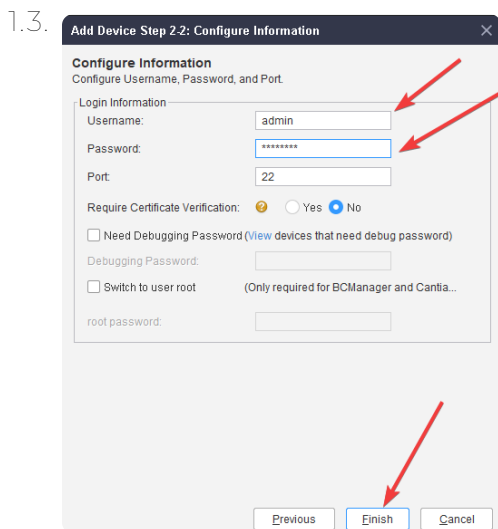
с использованием SmartKit

1 Добавьте СХД в SmartKit, следуя инструкции на изображениях ниже:
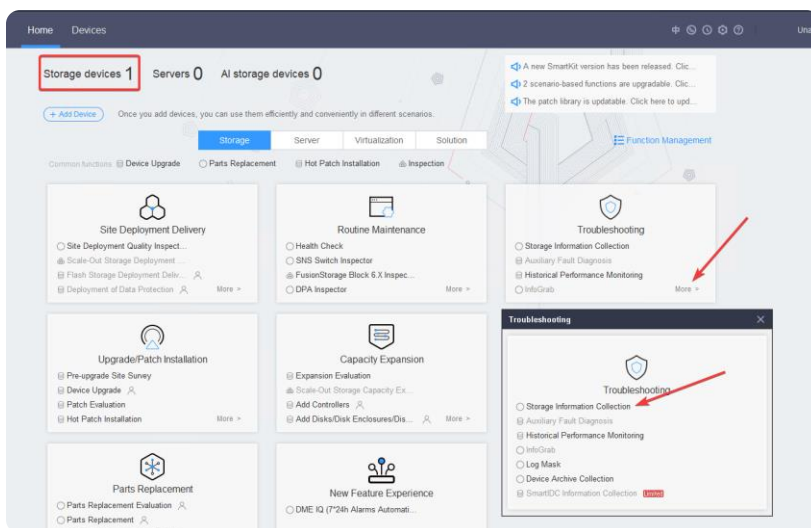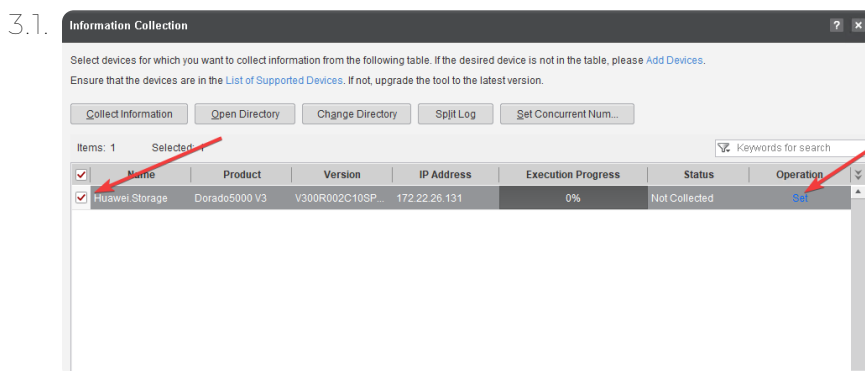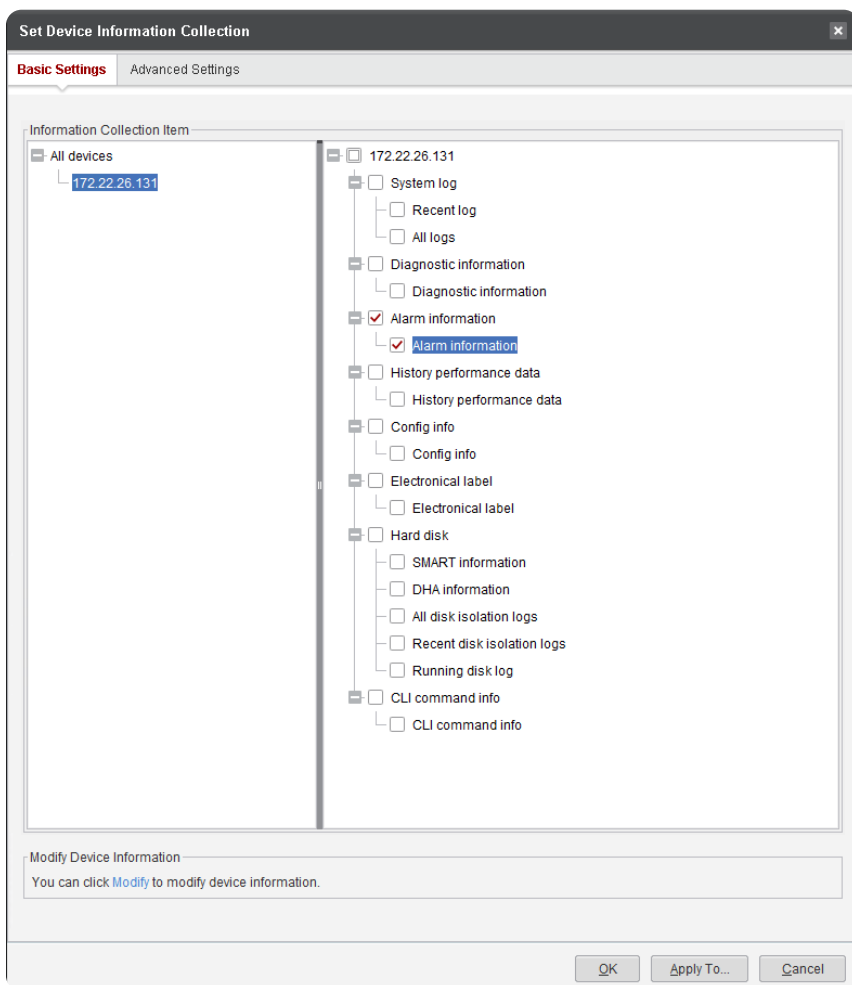
1.1.

1.2.

1.3.

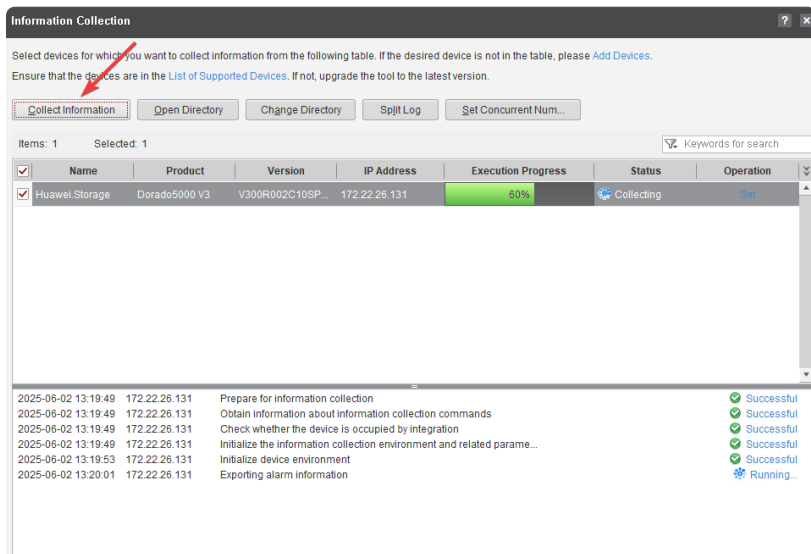2 Далее выберите Troubleshooting -> Storage Information Collection:

3 В меню инструмента сбора логов необходимо отметить СХД, нажать Set и выбрать Alarm Information:

3.1.

3.2.

Set Device Information Collection

Basic Settings   Advanced Settings

Information Collection Item

All devices
└ 172.22.26.131

☐ 172.22.26.131
  ☐ System log
    ☐ Recent log
    ☐ All logs
  ☐ Diagnostic information
    ☐ Diagnostic information
  ☑ Alarm information
    ☑ Alarm information
  ☐ History performance data
    ☐ History performance data
  ☐ Config info
    ☐ Config info
  ☐ Electronical label
    ☐ Electronical label
  ☐ Hard disk
    ☐ SMART information
    ☐ DHA information
    ☐ All disk isolation logs
    ☐ Recent disk isolation logs
    ☐ Running disk log
  ☐ CLI command info
    ☐ CLI command info

Modify Device Information

You can click Modify to modify device information.

OK   Apply To...   Cancel

④ Нажмите OK, а затем Collect Information — начнётся процесс сбора логов:

Information Collection

Select devices for which you want to collect information from the following table. If the desired device is not in the table, please Add Devices.
Ensure that the devices are in the List of Supported Devices. If not, upgrade the tool to the latest version.

Collect Information   Open Directory   Change Directory   Split Log   Set Concurrent Num...

Items: 1   Selected: 1   Keywords for search

☑	Name	Product	Version	IP Address	Execution Progress	Status	Operation
☑	Huawei.Storage	Dorado5000 V3	V300R002C10SP...	172.22.26.131	60%	Collecting	Set

2025-06-02 13:19:49	172.22.26.131	Prepare for information collection	✓ Successful
2025-06-02 13:19:49	172.22.26.131	Obtain information about information collection commands	✓ Successful
2025-06-02 13:19:49	172.22.26.131	Check whether the device is occupied by integration	✓ Successful
2025-06-02 13:19:49	172.22.26.131	Initialize the information collection environment and related parame...	✓ Successful
2025-06-02 13:19:53	172.22.26.131	Initialize device environment	✓ Successful
2025-06-02 13:20:01	172.22.26.131	Exporting alarm information	✿ Running...

5 После завершения сбора нажмите Open Director.
Откроется директория с собранными логами: